


## Epson VS400 Multimedia Projector

Product Name	Product Code	UPC
Epson VS400	V11H326020	0 10343 88005 4
Genuine Epson Lamp	V13H010L53	0 10343 87483 1
Replacement Air Filter	V13H134A24	0 10343 87484 8

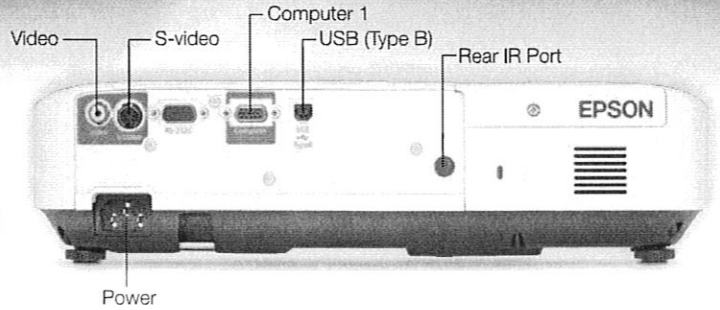

### Specifications

**Projection System**  
Epson 3LCD, 3-chip technology

**Projection Method**  
Front/rear/ceiling mount

**Driving Method**  
Epson Poly-silicon TFT Active Matrix

**Pixel Number**  
786,432 (1024 x 768) x 3

**White Light Output<sup>1</sup>**  
4000 lumens (ISO 21118 Standard)

**Color Light Output<sup>1</sup>**  
4000 lumens

**Aspect Ratio**  
16:10

**Native Resolution**  
1024 x 768 (XGA)

**Resize Support**  
640 x 480 (VGA), 800 x 600 (SVGA),  
1024 x 768 (XGA), 1152 x 864 (SXGA),  
1440 x 900 (WSXGA), 1680 x 1050 (WSXGA+),  
1400 x 1050 (SXGA+), 1600 x 1200 (UXGA)

**Lamp Type**  
E-TORL 230 W UHE

**Lamp Life<sup>2</sup>**  
Up to 3500 hours (ECO Mode)  
Up to 2500 hours (Normal Mode)

**Throw Ratio Range**  
1.62 – 2.61

**Size (projected distance)**  
30" – 300" 16:10 aspect (0.76 – 7.62 m)

**Keystone Correction Manual**  
Vertical: ± 30 degrees, (± 45 manual)  
Horizontal ± 20 degrees, (± 30 manual)

**USB Plug 'n Play**  
USB Plug 'n Play for Windows<sup>®</sup> 2000 or later

**Other Connectivity**  
Mac<sup>®</sup> compatible via DVI to VGA adapter  
(not included)

**Contrast Ratio**  
Up to 2000:1

**Color Reproduction**  
16.77 million colors

### Projection Lens

**Type**  
Powered focus  
Manual (optical) zoom

**F-number Focal Length**  
1.75 – 2.42 (24 mm – 38.2 mm)

**Zoom Ratio**  
Optical zoom 1.0 – 1.6

### Other

**Display Performance**  
NTSC: 480 lines  
PAL: 560 lines  
(Depends on observation of the multi-burst pattern)

**Input Signal**  
NTSC/NTSC4.43/PAL/M-PAL/N-PAL/  
PAL60/SECAM

**Interfaces**  
Computer/component video: D-sub 15 pin x 1  
S-video: Mini DIN x 1  
Composite video: RCA x 1  
USB connector: Type-B x 1 (USB display and mouse/keyboard control)  
Serial: RS-232c x 1

**Operating Temperature**  
41 ° to 95 °F (5 ° to 35 °C)

**Power Supply Voltage**  
100 – 240 V ± 10%, 50/60 Hz

**Power Consumption**  
317 W (Normal Mode)  
7.2 W Standby (Communication On)  
0.2 W Standby (Communication Off)

**Fan Noise**  
29 dB (ECO Mode)  
37 dB (Normal Mode)

**Security**  
Kensington<sup>®</sup>-style lock provision, security anchor bar

### Dimensions (W x D x H)

Including feet: 14.1" x 10.12" x 3.74"  
Excluding feet: 14.1" x 10.12" x 3.4"  
Weight: 7.82 lb

### Remote Control

**Features**  
Search, comp, video, USB, LAN, power, aspect, color mode, volume, e-zoom, A/V mute, freeze, menu, page up and down, help, auto, mouse functions, user, ID num, pointer, esc, enter

**Operating Angle**  
Right/left: ± 30 degrees  
Upper/lower: ± 30 degrees

**Operating Distance**  
26' (8 m)

### Support

**The Epson Connection<sup>SM</sup>**  
Pre-sales support (U.S. and Canada):  
800-463-7766  
Internet website: [www.epson.com](http://www.epson.com)

**Service Programs**  
Two-year projector limited warranty, Epson Road Service program, Epson PrivateLine<sup>®</sup> dedicated toll-free support and 90-day lamp limited warranty

**What's In The Box**  
Power cord, computer cable (VGA), USB cable, projector remote control, batteries, user manual CD, projector software CD, Quick Setup Sheet, PrivateLine support card, and password protection sticker

### Accessory Part Numbers

Universal projector ceiling mount	ELPMBPJF
Advanced projector ceiling mount	ELPMBPRG
High-security projector ceiling mount	ELPMBATA
Adjustable suspended ceiling channel kit	ELPMBP01
False ceiling plate kit	ELPMBP02
Structural round ceiling plate	ELPMBP03
Adjustable extension column (pipe) 8" – 11"	ELPMBC01
Component to VGA video cable	ELPKC19
50" portable screen	ELPSC06
80" portable pop-up screen	ELPSC08
Duet <sup>™</sup> screen	ELPSC80
Epson DC-06 document camera	V12H321001
Kensington security lock	ELPSL01
Distribution amplifier	ELPDA01
Genuine Epson lamp	V13H010L53
Replacement air filter	V13H134A24

### Packaging Specifications

**Epson VS400**  
Dimensions 20.6" x 15.4" x 9.1" (W x D x H)  
Weight 14.8 lb

**Genuine Epson Lamp**  
Dimensions 6.1" x 5.4" x 5.5" (W x D x H)  
Weight 0.8 lb  
Master Carton  
Dimensions 28.2" x 12.9" x 6.4" (W x D x H)  
Weight 9.1 lb  
Units Per Master Carton 10

**Air Filter Set**  
Dimensions 4.7" x 3.3" x 1.8" (W x D x H)  
Weight 0.1 lb  
Master Carton  
Dimensions 9.9" x 7.1" x 5.3" (W x D x H)  
Weight 1.0 lb  
Units Per Master Carton 10

1 Light output varies depending on modes (color and white light output). White light output measured using ISO 21118 standard.  
2 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.  
3 Data source: ProjectorCentral.com, Jan. 2010. Average of 910 shipping models, for which manufacturers provided lumens and total power data. All resolutions and brightness levels.  
4 See our website for convenient and reasonable recycling options at [www.epson.com/recycle](http://www.epson.com/recycle)  
5 SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency.