
# **ES7411 Specifications**



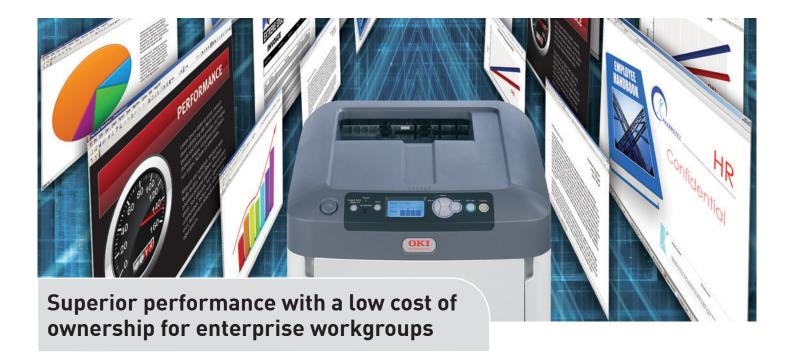

When productivity in the workplace really matters, if your team is taking on tight deadlines and demanding workloads, you need a network colour printer you can really depend on. The ultra-reliable digital LED technology, rapid throughput and a robust yet compact design deliver enterprise-class performance that just won't let you down.

And that's not all. With its superb print quality, exceptional media flexibility, superior energy efficiency and a genuinely low total cost of ownership, the ES7411 is a solid investment in the future of your business.

# Print more, faster

- Enterprise-class colour print speeds of 34ppm and 36ppm black & white
- First colour page prints in just 9 seconds (8 seconds black & white)
- Generous 256MB RAM and 533MHz processor for rapid throughput
- Large paper supply, extendable to 1,690 sheets

#### Handle heavy workloads with ease

- Flat paper path copes more easily with high print volumes
- Heavy-duty materials, rugged components and ultra-reliable digital LED technology
- User-replaceable, quick-change toners for maximum uptime

## Reduce and control your print costs

- Attractive price tag and low cost per page
- High-yield toners and long-life image drums
- Consumes just 1.2 watts in sleep mode, reducing energy bills
- Print Control software helps you manage print volumes by restricting usage
- PrintSuperVision software lets you track usage and monitor and manage your printers
- Colour Access Policy Manager lets you control and monitor the use of colour

## **Professional print quality**

- ProQ2400 Multi-level output quality, 1200 x 600dpi print resolution
- Microfine High Definition toner ensures documents are sharper, crisper and glossier, even on ordinary office paper

#### First class media flexibility

- Paper sizes from A6 to A4, plus 210 x 1200mm banners
- Print on stock from 64 to 250gsm
- Print on specialist media including business cards, CD labels and polyester film

#### Impeccable security

Now you can remove the risk of sensitive information falling into the wrong hands with the Secure Print<sup>2</sup> utility. A print run can only start when you enter your private PIN at the printer, and data is encrypted before sending and securely erased after use.



# **ES7411 - Colour and Mono Printer**

PRINTER		PAPER HANDLING	
A4 Print speed	34ppm colour, 36ppm mono	Paper capacity	Tray 1: 530 sheets of 80gsm; Multi-purpose tray: 100 sheet
Time to first print	9 seconds colour, 8 seconds mono		of 80gsm
Warm up time	Up to 60 seconds from power on & up to 35 seconds from power save	Paper capacity optional trays	Tray 2: 530 sheets of 80gsm; Tray 3: 530 sheets of 80gsm;
<u> </u>		Maximum paper capacity	1,690 sheets of 80gsm
Processor speed   533MHz PRINT QUALITY			Tray 1/2/3: A4, A5, B5; Multi-purpose tray: A4, A5, B5, A6; 1 Envelopes (Com-9, Com-10, DL, Monarch, C5); Labels (Avery
Resolution	ProQ2400 Multi-level technology, 1200 x 600dpi, 600 x 600dpi	Paper sizes	7162, 7664, 7666); Custom size (up to 1200mm length including Banner); <b>Duplex:</b> A4, A5, B5; Custom Size: Width 148-215.9mm Length 210-355.6mm
Enhancements	Auto Colour Balance, Photo Enhance via driver (excludes Mac and PostScript drivers)		
TYPEFACES		Paper weight	Tray 1/2/3: 64 to 220gsm; Multi-purpose tray: 64 to 250gsm Duplex: 64 to 220gsm
Printer fonts	Scalable: 87 PCL fonts and 136 PostScript fonts, PCL Bitmap	Duplex	Optional
Barcode	fonts, OCR-A/B, USPS ZIP Barcode  Barcode with Checksum support	Paper output	350 sheets face down tray, 100 sheets face up tray (80gsm)
		General Features	
INTERFACE AND SOFTWARE  Connectivity	Hi-Speed USB, 10/100-TX Ethernet, IEEE 1284	Memory	Standard RAM: 256MB; Maximum RAM: 768MB Optional SDHC Memory Card <sup>4</sup> : 16GB
Printer languages	Bi-directional Parallel PCL 6 (XL3.0) and PCL5c, PostScript 3 emulation, SIDM (IBM-PPR, EPSON-FX), PDF Direct Print v1.7, XPS	Operating conditions	Temperature/Humidity: 10°C to 32°C (17°C to 27°C recommended) / 20% to 80% RH (50% to 70% RH recommended)
Network & protocols	All major network protocols supported via ethernet card with internal web server for printer and network card set-up and management. TCP/IP: ARP, IPv4/v6, ICMPv4/v6, TCP, UDP, LPR, FIP, TELNET, HTTP(IPP), BOOTP, DHCP, SNMPv1/v3, DNS, DDNS, UPnP, Bonjour, WINS, SSL/TLS, SMTP, POP3, SNTP, WSDPrint, JetDirect protocols. NetBIOSoverTCP, NetWare 3.x, 4.x, 5.x and 6 with full NDS and NDPS supporte. PServer, RPrinter, NDPS supported via dedicated OKI NDPS Gateway. AppleTalk:- ELAP, AARP, DDP, AEP, NBP, ZIP, RTMP, ATP, PAP. NetBEUI:- SMB, NetBIOS. Other:EAP		Storage: -10°C to 43°C, 10% to 90% RH
		Power supply	Single phase 220 to 240VAC, frequency 50/60Hz +/- 2%
		Power consumption	Typical: 600W; Max: 1300W; Idle: 100W (average); Power Save: <15W Sleep: 1.2W
		Noise level	Operating: 54dB(A) Standby: 37dB(A) Power save: Background level
		Dimensions (HxWxD)	389 x 435 x 604mm
OS Compatibility¹	Windows 2000 / XP Home / XP Professional / XP Professional x64 / Server 2003 / Server 2003 x64 / Server 2008 / Server 2008 x64 / Vista (32-bit & 64-bit); Mac OS X 10.3.9 - 10.6.1		31kg
		Product order number	<b>ES7411:</b> 44205415; <b>ES7411dn:</b> 44205415dn; <b>ES7411dn:</b> 44205415dtn
Advanced networking	IPv6, 802.1x authentication, SNMPv3, SSL/TLS HTTPS encrpytion, Secure Print², Secure Erase², Data encrpytion², MAC filtering, IP filtering, IPSec	Accessories (Order Numbers)	
and security		2nd paper tray	44274503
Utility Suite <sup>1</sup>	Color Correct, OKI LPR <sup>3</sup> , PrintSuperVision.net <sup>3</sup> , Swatch Utility, Template Manager <sup>3</sup> , Web Driver Installer <sup>3</sup> , Print Control Server <sup>3</sup> , Print Control Client, Storage Device Manager <sup>28,3</sup> , Gamma Utility, Profile Assistant <sup>2</sup> , Color Access Policy Manager <sup>3</sup>	3rd paper tray	44274503
		Duplex	44274303
		Memory	<b>512MB:</b> 44302207
		SDHC Memory Card <sup>4</sup>	16GB: 44301003

<sup>&</sup>lt;sup>1</sup> Check local OKI Executive Series website for latest driver releases and OS compatibility; <sup>2</sup>SDHC Memory Card required; <sup>3</sup>Windows only; <sup>4</sup>Secure Digital High Capacity (SDHC) Memory Card supports up to 32GB. OKI is not responsible for any compatibility risk using non OKI genuine SDHC Memory Card; <sup>5</sup>Including all consumables.

Consumables Information: For the protection of your printer, and in order to ensure that you benefit from its full functionality, this model has been designed to operate only with genuine OKI Printing Solutions toner cartridges. These can be identified by the OKI trademark. Any other toner cartridge may not operate at all, even if it is described as "compatible", and if it does work, your printer's performance and print quality may be degraded.

# OKI DATA AUSTRALIA

Level 1, 67 Epping Road Macquarie Park NSW 2113 T (02) 8071 0000 F (02) 8071 0010 www.okiexecutiveseries.com.au



