

SETTING UP SCAN TO EMAIL ON OKI ES7470/ES7480

1 - OBTAIN THE IP ADDRESS OF YOUR COPIER

ON THE COPIER

PRESS THE SETTING BUTTON

THEN ON THE LCD PRESS ADMIN


ENTER THE ADMIN PASSWORD (DEFAULT IS 123456)

THEN PRESS ON LIST/REPORT

THEN LIST

THEN NIC CONFIGURATION PAGE

2 - OPEN UP YOUR WEB BROWSER (MUST BE FROM A PC THAT IS CONNECTED TO THE SAME NETWORK) AND TYPE THE IP ADDRESS INTO THE ADDRESS BAR

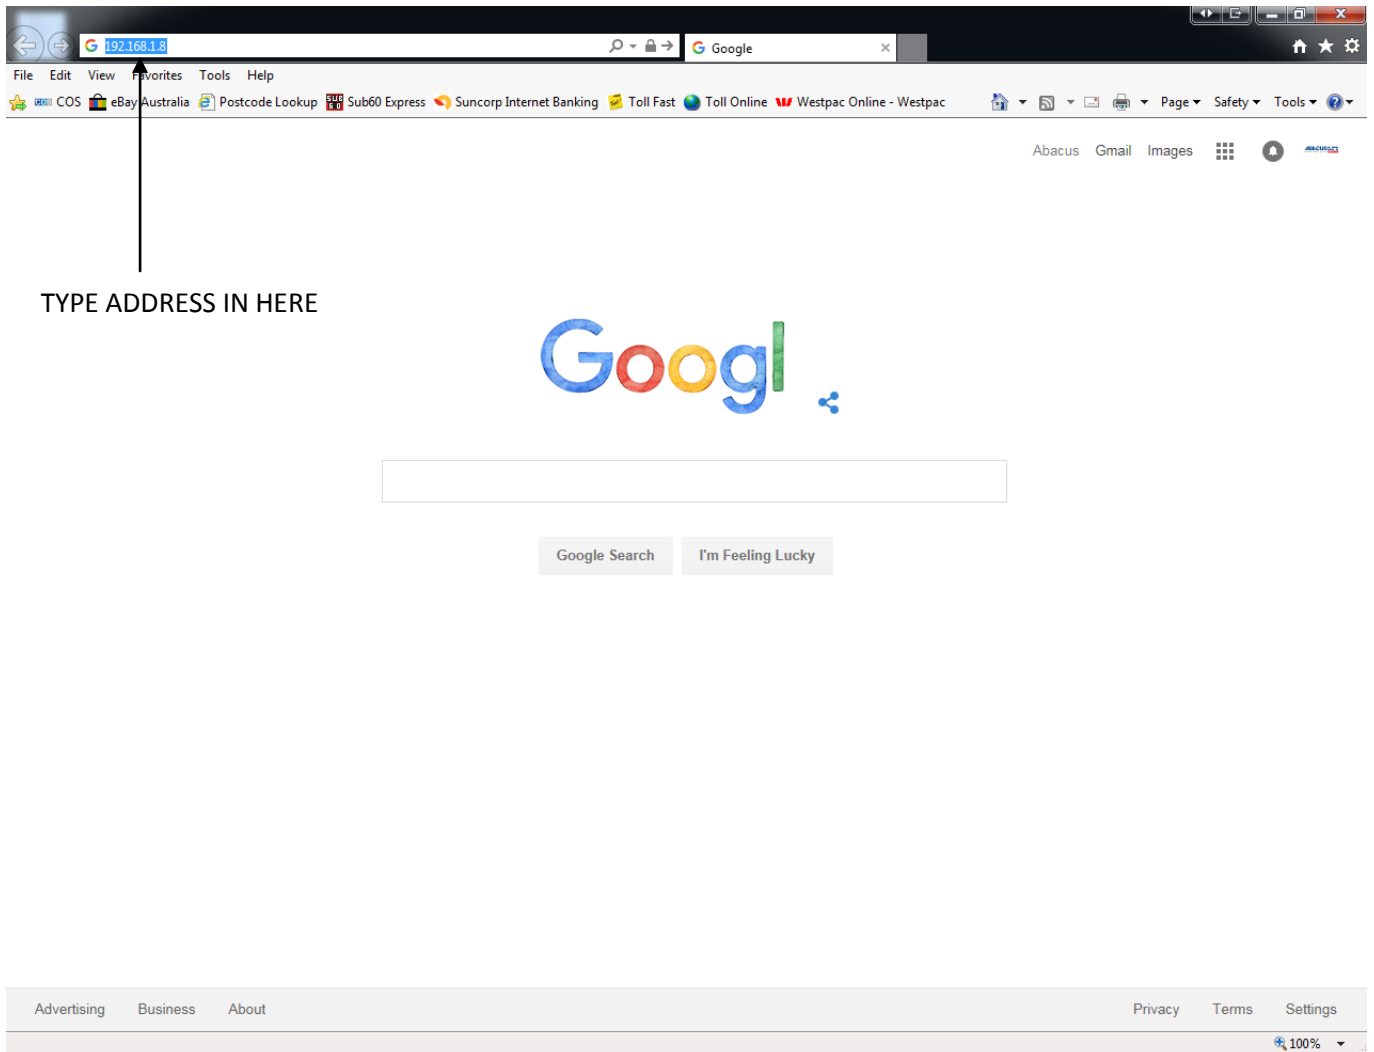

The image shows a screenshot of a web browser window. The address bar at the top contains the IP address '192.168.1.8'. Below the address bar, the Google logo is displayed in its characteristic multi-colored font. Underneath the logo is a search input field, and below that are two buttons: 'Google Search' and 'I'm Feeling Lucky'. At the bottom of the browser window, there is a footer with links for 'Advertising', 'Business', and 'About' on the left, and 'Privacy', 'Terms', and 'Settings' on the right. The zoom level is set to 100%.

TYPE ADDRESS IN HERE

3 - YOU WILL NOW SEE THE FOLLOWING SCREEN

The screenshot shows the OKI web interface with a red header bar. On the right, there are links for "e-Filing" and "Login". Below the header is a navigation bar with tabs: "Device" (selected), "Job Status", "Logs", "Registration", and "Counter". The main content area is titled "Device" and includes a printer icon with a warning sign, a "REFRESH" button, and several data sections:

- Options:**

Finisher	Inner Finisher
Fax	None
- Toner:**

Yellow(Y)	100%
Magenta(M)	100%
Cyan(C)	100%
Black(K)	100%
- Device Information:**

Status	Alerts
Name	MFPAEB3D1
Location	
Copier Model	OKI ES7480 MFP
Serial Number	AK54049699
MAC Address	00:80:91:AE:B3:D1
Main Memory Size	2048 MB
Page Memory Size	512 MB
Save as File & e-Filing Space Available	226306 MB
Fax Space Available	943 MB
Contact Information	
Phone Number	
Message	
Alerts	• Check Fuser Unit.
- Paper:**

Tray	Size	Thickness	Attribute	Capacity	Level
Tray 1	A4	Plain	None	530	Full

4 - CLICK ON LOGIN

5 - YOU WILL GET THIS DIALOGUE BOX

Login with your TopAccess User Name and Password.

The login dialog box is light blue and contains the following elements:

- Text: "User Name" followed by an input field.
- Text: "Password" followed by an input field.
- Buttons: "Login" and "Cancel".

6 - ENTER THE LOGIN DETAILS (default username is admin and password is 123456) AND CLICK LOGIN

7 - CLICK ON ADMINISTRATION

The screenshot shows the OKI web interface with the "Administration" tab selected in the navigation bar. The main content area is titled "Device" and includes a printer icon with a warning sign, a "REFRESH" button, and several data sections:

- Options:**

Finisher	Inner Finisher
Fax	None
- Toner:**

Yellow(Y)	100%
Magenta(M)	100%
Cyan(C)	100%
Black(K)	100%
- Device Information:**

Status	Alerts
Name	MFPAEB3D1
Location	
Copier Model	OKI ES7480 MFP
Serial Number	AK54049699
MAC Address	00:80:91:AE:B3:D1
Main Memory Size	2048 MB
Page Memory Size	512 MB
Save as File & e-Filing Space Available	226306 MB
Fax Space Available	943 MB
Contact Information	
Phone Number	
Message	
Alerts	• Check Fuser Unit.
- Paper:**

Tray	Size	Thickness	Attribute	Capacity	Level
Tray 1	A4	Plain	None	530	Full

8 - CLICK ON NETWORK

OKI [e-Filing](#)
[Logout](#)

Device | Job Status | Logs | Registration | Counter | User Management | **Administration**

Setup | Security | Maintenance | Registration | AirPrint

Setup

General | **Network** | Copier | Save as file | Email | InternetFax | Printer/e-Filing | Printer | Print Service | ICC Profile | Print Data Converter | EWB | ODCA | Version

Save Cancel

General Setting

Device Information

Name	MFPAEB3D1
Copier Model	OKI ES7480 MFP
Serial Number	AK54049699
MAC Address	00:80:91:AE:B3:D1
Save as File & e-Filing Space Available	226306 MB
Fax Space Available	943 MB
Data Cloning Function	Enable ▾
USB Direct Print	Enable ▾
Location	<input type="text"/>
Geo Location	geo:90,180
Contact Information	<input type="text"/>
Service Phone Number	<input type="text"/>
Administrative Message	<input type="text"/>

Functions

Save as Local HDD	Enable ▾
e-Filing	Enable ▾
Email Send	Enable ▾
Save as FTP	Enable ▾
Save as FTPS	Enable ▾
Save to USB Media	Enable ▾

[Top](#) | [Help](#)

100% ▾

9 - THEN CLICK ON SMTP CLIENT

OKI [e-Filing](#)
[Logout](#)

Device | Job Status | Logs | Registration | Counter | User Management | **Administration**

Setup | Security | Maintenance | Registration | AirPrint

Setup

General | **Network** | Copier | Save as file | Email | InternetFax | Printer/e-Filing | Printer | Print Service | ICC Profile | Print Data Converter | EWB | ODCA | Version

Save

- [TCP/IP](#)
- [Filtering](#)
- [IPv6](#)
- [IPX/SPX](#)
- [Apple Talk](#)
- [Bonjour](#)
- [LDAP Session](#)
- [DNS Session](#)
- [DDNS Session](#)
- [SMB Session](#)
- [NetWare Session](#)
- [HTTP Network Service](#)
- [SMTP Client](#)
- [SMTP Server](#)
- [POP3 Network Service](#)
- [FTP Client](#)
- [FTP Server](#)
- [SLP Session](#)
- [SNMP Network Service](#)
- [Web Services Setting](#)
- [LLTD Session](#)
- [Wake Up Setting](#)

10 - THEN CLICK ON SMTP CLIENT

OKI

Device | Job Status | Logs | Registration | Counter | User Management | **Administration**

Setup | Security | Maintenance | Registration | AirPrint

Setup

[General](#) | [Network](#) | [Copier](#) | [Save as file](#) | [Email](#) | [InternetFax](#) | [Printer/e-Filing](#) | [Printer](#) | [Print Service](#) | [ICC Profile](#) | [Print Data Converter](#) | [EWB](#) | [ODCA](#) | [Version](#)

SMTP Client

Enable SMTP Client	Enable
Enable SSL	Disable
SSL/TLS	STARTTLS
SMTP Server Address	
POP Before SMTP	Disable
Authentication	Disable
Login Name	
Maximum Email / InternetFax Size	30 MB
Port Number	25
SMTP Client Connection Timeout(1-180)	30 Seconds

[Go to top of this page](#)

SMTP Server

Enable SMTP Server	Enable
Port Number	25
Email Address	
Enable OffRamp Gateway	Disable
OffRamp Security	Enable
OffRamp Print	Enable

[Go to top of this page](#)

POP3 Network Service

Enable POP3 Client	Enable
Enable SSL	Disable
POP3 Server Address	
Authentication	Disable
Type POP3 Login	AUTO
Account Name	
Scan Rate	5 Minutes
Port Number	110
SSL Port Number	995
POP3 Client Connection Timeout(1-180)	30 Seconds

[Top](#) | [Help](#)

11 - THIS BOX WILL NOW OPEN IN A NEW WINDOW - FILL IN THE DETAILS THAT ARE REQUIRED

SMTP Client

Selecting 'Save' in the Main Window is required to Save the new settings.

Enable SMTP Client

Enable SSL

SSL/TLS

SMTP Server Address

POP Before SMTP

Authentication

Login Name

Password

Maximum Email / InternetFax Size(2-100) MB

Port Number

SMTP Client Connection Timeout(1-180) Seconds

ENTER YOUR EMAIL SERVER ADDRESS

IF YOU REQUIRE AUTHENTICATION CHANGE THIS TO AUTO AND THEN FILL IN YOUR USERNAME AND PASSWORD

12 - FINALLY CLICK OK ONCE YOU HAVE ENTERED ALL OF YOUR REQUIRED SETTINGS

13 - YOU WILL COME BACK TO THIS SCREEN - CLICK ON SMTP SERVER

OKI

Navigation tabs: Device, Job Status, Logs, Registration, Counter, User Management, Administration

Sub-navigation: Setup, Security, Maintenance, Registration, AirPrint

Setup

[General](#) | [Network](#) | [Copier](#) | [Save as file](#) | [Email](#) | [InternetFax](#) | [Printers-Filing](#) | [Printer](#) | [Print Service](#) | [ICC Profile](#) | [Print Data Converter](#) | [EWB](#) | [ODCA](#) | [Version](#)

SMTP Client

Enable SMTP Client	Enable
Enable SSL	Disable
SSL/TLS	STARTTLS
SMTP Server Address	
POP Before SMTP	Disable
Authentication	Disable
Login Name	
Maximum Email / InternetFax Size	30 MB
Port Number	25
SMTP Client Connection Timeout(1-180)	30 Seconds

[Go to top of this page](#)

SMTP Server

Enable SMTP Server	Enable
Port Number	25
Email Address	
Enable OffRamp Gateway	Disable
OffRamp Security	Enable
OffRamp Print	Enable

[Go to top of this page](#)

POP3 Network Service

Enable POP3 Client	Enable
Enable SSL	Disable
POP3 Server Address	
Authentication	Disable
Type POP3 Login	AUTO
Account Name	
Scan Rate	5 Minutes
Port Number	110
SSL Port Number	995
POP3 Client Connection Timeout(1-180)	30 Seconds

[Top](#) | [Help](#)

14 - THIS DIALOGUE BOX WILL OPEN IN A NEW WINDOW - ENTER IN THE EMAIL ADDRESS YOU WANT THE COPIER TO USE - THIS DOES NOT ALWAYS HAVE TO BE A VALID EMAIL ADDRESS

SMTP Server

Selecting 'Save' in the Main Window is required to Save the new settings.

Enable SMTP Server	<input type="button" value="Enable"/> ▾
Port Number	<input type="text" value="25"/>
Email Address	<input type="text"/>
Enable OffRamp Gateway	<input type="button" value="Disable"/> ▾
OffRamp Security	<input type="button" value="Enable"/> ▾
OffRamp Print	<input type="button" value="Enable"/> ▾

15 - CLICK OK

16 - YOU WILL COME BACK TO THIS SCREEN AGAIN - CLICK SAVE

OKI

Device | Job Status | Logs | Registration | Counter | User Management | Administration

Setup | Security | Maintenance | Registration | AirPrint

Setup

[General](#) | [Network](#) | [Copier](#) | [Save as file](#) | [Email](#) | [InternetFax](#) | [Printer/e-Filing](#) | [Printer](#) | [Print Service](#) | [ICC Profile](#) | [Print Data Converter](#) | [EWB](#) | [ODCA](#) | [Version](#)

Save

SMTP Client

Enable SMTP Client	Enable
Enable SSL	Disable
SSL/TLS	STARTTLS
SMTP Server Address	
POP Before SMTP	Disable
Authentication	Disable
Login Name	
Maximum Email / InternetFax Size	30 MB
Port Number	25
SMTP Client Connection Timeout(1-180)	30 Seconds

[Go to top of this page](#)

SMTP Server

Enable SMTP Server	Enable
Port Number	25
Email Address	
Enable OffRamp Gateway	Disable
OffRamp Security	Enable
OffRamp Print	Enable

[Go to top of this page](#)

POP3 Network Service

Enable POP3 Client	Enable
Enable SSL	Disable
POP3 Server Address	
Authentication	Disable
Type POP3 Login	AUTO
Account Name	
Scan Rate	5 Minutes
Port Number	110
SSL Port Number	995
POP3 Client Connection Timeout(1-180)	30 Seconds

[Top](#) | [Help](#)

17 - REFRESH THE PAGE IN AROUND 30 SECONDS - YOU CAN DO THIS BY PRESSING THE F5 KEY ON YOUR KEYBOARD

18 - UP THE TOP OF THE PAGE YOU WILL HAVE THIS - CLICK ON REGISTRATION

OKI

Device | Job Status | Logs | Registration | Counter | User Management | Administration

Setup | Security | Maintenance | Registration | AirPrint

Setup

[General](#) | [Network](#) | [Copier](#) | [Save as file](#) | [Email](#) | [InternetFax](#) | [Printer/e-Filing](#) | [Printer](#) | [Print Service](#) | [ICC Profile](#) | [Print Data Converter](#) | [EWB](#) | [ODCA](#) | [Version](#)

Save | Cancel

19 - YOU WILL NOW HAVE THIS PAGE - CLICK HERE

OKI

Device | Job Status | Logs | Registration | Counter | User Management | Administration

Setup | Security | Maintenance | Registration | AirPrint

Registration

Public Template | [Public Menu](#) | [InternetFAX Received Forward](#)

Reset

No.	Name	User Name
Public	Public Template Groups	

Panel View | [List view](#)

Please click a template picture to edit.

Jump to

[1-6](#) [7-12](#) [13-18](#) [19-24](#) [25-30](#) [31-36](#) [37-42](#) [43-48](#) [49-54](#) [55-60](#)

Templates 1-6

1		Undefined	2		Undefined
		Undefined			Undefined
3		Undefined	4		Undefined
		Undefined			Undefined
5		Undefined	6		Undefined
		Undefined			Undefined

[Go to top of this page](#)

Templates 7-12

7		Undefined	8		Undefined
		Undefined			Undefined
9		Undefined	10		Undefined
		Undefined			Undefined
11		Undefined	12		Undefined
		Undefined			Undefined

[Go to top of this page](#)

20 - CLICK ON SCAN AND THEN EMAIL - IF SAVE AS FILE IS TICKED UNTICK IT

OKI

Device | Job Status | Logs | Registration | Counter | User Management | Administration

Setup | Security | Maintenance | Registration | AirPrint

Template Properties

[Public Template](#)

Save Cancel

Select Agent

- Copy
- Fax
- InternetFax
- Scan
- Meta Scan

- Email
- Save as file
- Store to e-Filing
- Store to USB Media

21 - THEN CLICK ON SELECT AGENT

22 - CLICK ON PANEL SETTING TO CHANGE THE NAME TO SOMETHING UNIQUE IF YOU ARE SETTING UP MULTIPLE SCAN TO EMAIL PROFILES - YOU NORMALLY ONLY CHANGE CAPTION 2

OKI

Device | Job Status | Logs | Registration | Counter | User Management | **Administration**

Setup | Security | Maintenance | **Registration** | AirPrint

Template Properties

[Public Template](#)

Save | Cancel

Select Agent

Copy
 Fax / InternetFax
 Scan
 Meta Scan

Email
 Save as file
 Store to e-Filing
 Store to USB Media

Panel Setting

Picture	
Caption1	SCAN TO
Caption2	E-MAIL
User Name	
Automatic Start	Disable
Notification	

TO: Destination Setting

TO: Destination

CC: Destination Setting

CC: Destination

BCC: Destination Setting

BCC: Destination

Email Setting

Subject	Use Email Setting in Administration Setting & Date/Time
From Address	Use From Address Setting set by Administrator
From Name	Use From Name Setting set by Administrator
Body	
File Format	PDF(Multi)

[Top](#) | [Help](#)

23 - CLICK ON TO: DESTINATION SETTING

Recipient List

Save | Cancel | **New** | Address Book | Address Group | Search | Delete

<input checked="" type="checkbox"/>	▼Name	Destination
-------------------------------------	-------	-------------

24 - THIS DIALOGUE BOX WILL OPEN IN A NEW WINDOW - CLICK ON NEW

Contact Property

OK | Cancel | Reset

*Required

*Destination

25 - THIS DIALOGUE BOX WILL OPEN IN A NEW WINDOW - ENTER THE EMAIL ADDRESS IN THE DESTINATION

26 - THEN CLICK OK

27 - YOU WILL COME BACK TO THIS SCREEN - BUT IT WILL HAVE A DESTINATION ENTERED CLICK SAVE

Recipient List

Save Cancel New Address Book Address Group Search Delete

<input checked="" type="checkbox"/>	▼Name	Destination
-------------------------------------	-------	-------------

28 - YOU WILL COME BACK TO THIS SCREEN - CLICK ON EMAIL SETTING

OKI

Device Job Status Logs Registration Counter User Management Administration

Setup Security Maintenance Registration AirPrint

Template Properties

Public Template ▶

Save Cancel

Select Agent

- Copy
- Fax / InternetFax
- Scan
- Meta Scan

- Email
- Save as file
- Store to e-Filing
- Store to USB Media

Panel Setting

Picture	
Caption1	SCAN TO
Caption2	E-MAIL
User Name	
Automatic Start	Disable
Notification	

TO: Destination Setting

TO: Destination

CC: Destination Setting

CC: Destination

BCC: Destination Setting

BCC: Destination

Email Setting

Subject	Use Email Setting in Administration Setting & Date/Time
From Address	Use From Address Setting set by Administrator
From Name	Use From Name Setting set by Administrator
Body	
File Format	PDF(Multi)

Top Help

29 - YOU WILL THEN GET THIS BOX

Email Setting

Save Cancel

*Required

Subject	<input checked="" type="radio"/> Use Email Setting in Administration Setting <input type="radio"/> Send data from (Device name) [(Template Name)] <input type="radio"/> Add the date and time to the subject
*From Address	<input checked="" type="radio"/> Use From Address Setting set by Administrator <input type="radio"/>
From Name	<input checked="" type="radio"/> Use From Name Setting set by Administrator <input type="radio"/>
Body	
File Format	PDF(Multi) ▼
	<input type="checkbox"/> Encryption User Password Retrive Password

30 - CHANGE TO PDF (SINGLE)

31 - CLICK SAVE

30 - IT WILL ONCE AGAIN COME BACK TO THIS SCREEN - CLICK SAVE



Navigation tabs: Device, Job Status, Logs, Registration, Counter, User Management, Administration (selected)

Sub-navigation: Setup, Security, Maintenance, Registration, AirPrint

Template Properties [Public Template ▶](#)

Buttons: Save, Cancel

Select Agent

- Copy
- Fax / InternetFax
- Scan
- Meta Scan
- Email
- Save as file
- Store to e-Filing
- Store to USB Media

Panel Setting

Picture	
Caption1	SCAN TO
Caption2	E-MAIL
User Name	
Automatic Start	Disable
Notification	

TO: Destination Setting

TO: Destination

CC: Destination Setting

CC: Destination

BCC: Destination Setting

BCC: Destination

Email Setting

Subject	Use Email Setting in Administration Setting & Date/Time
From Address	Use From Address Setting set by Administrator
From Name	Use From Name Setting set by Administrator
Body	
File Format	PDF(Multi)

[_Top_](#) [_Help_](#)

31 - IT WILL COME BACK TO THIS SCREEN - IF YOU NEED TO ADD MORE EMAIL ADDRESSES SIMPLY SELECT THE NEXT PROFILE



Navigation tabs: Device, Job Status, Logs, Registration, Counter, User Management, Administration (selected)

Sub-navigation: Setup, Security, Maintenance, Registration, AirPrint

Registration

Public Template | [Public Menu](#) | [InternetFax](#) | [Received Forward](#)

Buttons: Reset

No.	Name	User Name
Public	Public Template Groups	

Panel View | [List view](#)

Please click a template picture to edit.

Jump to: [1-6](#) [7-12](#) [13-18](#) [19-24](#) [25-30](#) [31-36](#) [37-42](#) [43-48](#) [49-54](#) [55-60](#)

Templates 1-6

1		SCAN TO	2		Undefined
		E-MAIL			Undefined
3		Undefined	4		Undefined
		Undefined			Undefined
5		Undefined	6		Undefined
		Undefined			Undefined

[Go to top of this page](#)

Templates 7-12

7		Undefined	8		Undefined
		Undefined			Undefined
9		Undefined	10		Undefined
		Undefined			Undefined
11		Undefined	12		Undefined
		Undefined			Undefined